




DIN socket RMD16



Technical specifications

Type	RMD16
Standard	IEC 60947-5-1
Contacts rated operating voltage Ue, V	~250
Rated current In, A	16
Rated frequency, Hz	50/60
Cross-section of connecting conductors, mm ²	up 6
DIN rail mounting	35x7.5
Comb bus connection	no
Protection class	IP20
Bolt tensioning torque, Nm	2
Altitude above sea level, m	2000
Operating temperature range, °C	-25...+60
Storage temperature range, °C	-40...+80

Overall dimensions

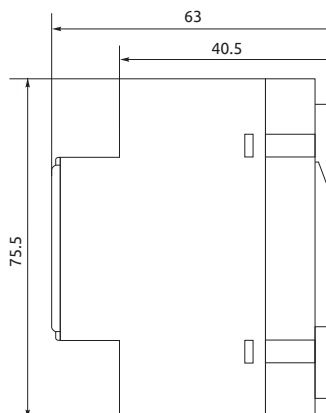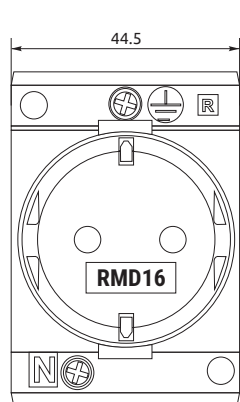

Order code	Name	Rated voltage, ~V	Packaging, pcs	Gross weight, kg
RMD16	Модульна розетка RMD16	250	1/5	0.130/0.650